

Note: Before installing, configuring, operating, or maintaining ProSoft Technology products, please review this information and the information located on www.prosoft-technology.com for the latest software, documentation, and installation files specific to your ProSoft Technology product.

Installation and maintenance of your ProSoft Technology product(s) should be carried out by suitably trained personnel in accordance with applicable codes of practice. In case of malfunction or damage, no attempts of repair should be made. Your ProSoft Technology product(s) should be returned to the manufacturer for repair. Do not dismantle the product.



For professional users in the European Union

If you wish to discard electrical and electronic equipment (EEE), please contact your dealer or supplier for further information.



WARNING – Cancer and reproductive harm – www.p65warnings.ca.gov

Your Feedback Please

We always want you to feel that you made the right decision to use our products. If you have suggestions, comments, compliments or complaints about our products, documentation, or support, please write or call us.

Corporate Office: ProSoft Technology, Inc.
9201 Camino Media, Suite 200
Bakersfield, CA 93311

European Office: Belden France
17, rue des Briquetiers
31700 Blagnac, France

ProSoft Technology, Inc.
+1 (661) 716-5100
+1 (661) 716-5101 (Fax)
www.prosoft-technology.com
ps.support@belden.com

ProSoft Technology® is a registered copyright of ProSoft Technology, Inc. All other brand or product names are or may be trademarks of, and are used to identify products and services of, their respective owners.

For Public Use.
Documentation is subject to change without notice.

North American Hazardous Location Approval

The following information applies when operating the product in hazardous locations:

-20°C to +70°C; T5
Class 1 Div 2 Gps A, B, C, D

THIS EQUIPMENT IS AN OPEN-TYPE DEVICE AND IS MEANT TO BE INSTALLED IN AN ENCLOSURE SUITABLE FOR THE ENVIRONMENT SUCH THAT THE EQUIPMENT IS ONLY ACCESSIBLE WITH THE USE OF A TOOL.

SUITABLE FOR USE IN CLASS I, DIVISION 2, GROUPS A, B, C AND D HAZARDOUS LOCATIONS, OR NONHAZARDOUS LOCATIONS ONLY.

CET ÉQUIPEMENT EST UN DISPOSITIF DE TYPE OUVERT ET EST CONÇU POUR ÊTRE INSTALLÉ DANS UN ENVIRONNEMENT ADAPTÉ À L'ENVIRONNEMENT TEL QUE L'ÉQUIPEMENT N'EST ACCESSIBLE QU'À L'AIDE D'UN OUTIL.


CONVIENT POUR UNE UTILISATION DANS LES ENDROITS DANGEREUX DE CLASSE I, DIVISION 2, GROUPES A, B, C ET D, OU ENDROITS NON DANGEREUX UNIQUEMENT.

Required Software

The PLX51-PBS requires the ProSoft PLX50 Configuration Utility to set up and configure. The software installation can be found at: www.prosoft-technology.com

Gateway Installation

The PLX51-PBS requires input power of 10 to 36 VDC. It communicates on both Ethernet and RS232/RS485. The module provides a DIN rail clip to mount onto a 35mm DIN Rail.

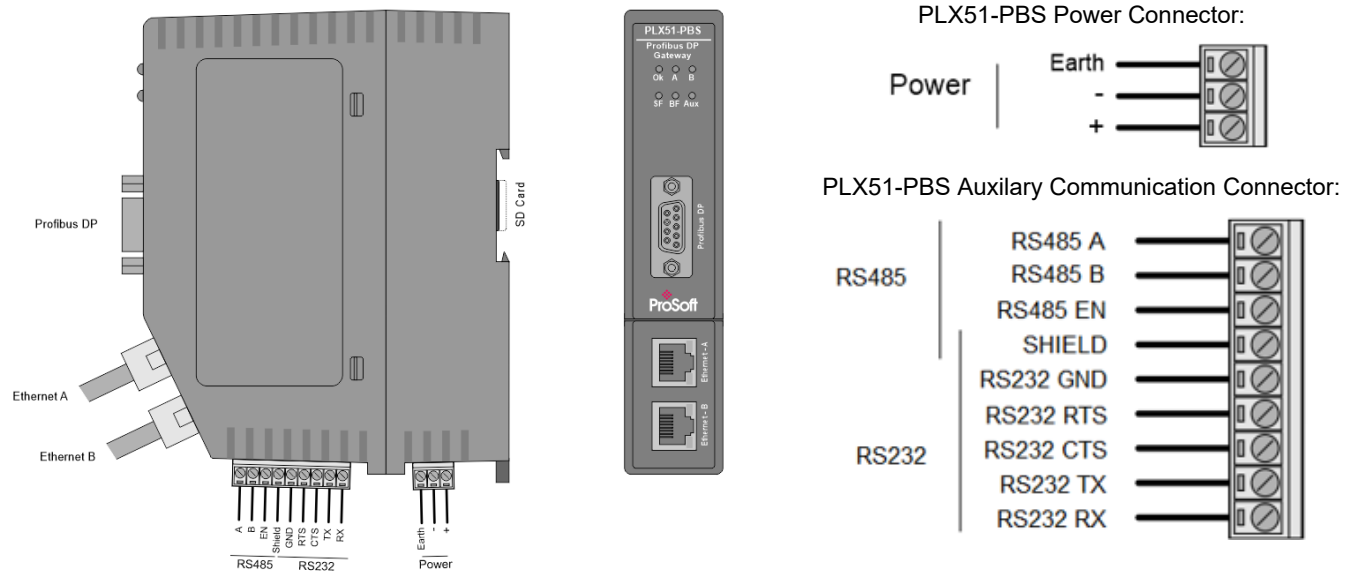

Ethernet Network Setup

The PLX51-PBS has DHCP enabled as factory default. Launch the DHCP server in the ProSoft PLX50 Configuration Utility to assign an IP address to the gateway. Then configure the gateway with ProSoft PLX50 Configuration Utility.

Support, Service, and Warranty

Internet	Website: www.prosoft-technology.com Email: ps.support@belden.com
North America	Tel: +1.661.716.5100 Email: ps.support@belden.com Languages spoken include: English, Spanish
Asia Pacific	Tel: +60.3.2247.1898 Email: ps.asiapc@belden.com Languages spoken include: Bahasa, Chinese, English, Japanese, Korean
Europe / Middle East / Africa	Tel: +33.(0)5.34.36.87.20 Email: ps.europe@belden.com Languages spoken include: French, English
Latin America	Tel: +52.222.264.1814 Email: ps.latinam@belden.com Languages spoken include: Spanish, English

For additional ProSoft Technology contacts in your area, please see: www.prosoft-technology.com/About-Us/Contact-Us

For details regarding ProSoft Technology's legal terms and conditions, please see: www.prosoft-technology.com/ProSoft-Technology-Legal-Terms-and-Conditions

For Return Material Authorization information, please see: www.prosoft-technology.com/Services-Support/Return-Material-Instructions